



INSTRUCTIONS FOR REMOVING AND REPLACING THE ETTORE RUBBER IN THE MASTER SQUEEGEE


NOTE: Ettore rubber is designed to function best in the Ettore squeegee.

1. To remove – Pull rubber enough to take the clip off, then pull rubber from the opposite end and remove the other clip.
2. To replace – insert rubber through the channel, then apply the first clip. Insert clip into position in channel. Pull rubber from the other end far enough to put on the other clip, and insert into channel.

NOTE: If clip has been used it must be opened before replacing.

Rubbers should be 1/8" longer than the channel (not stretched). The assembled channel and rubber should measure 1/4" less in overall length than the designated model size. (Example: the correct length of the assembled model size 18 is 17-3/4" – etc).

Correct position of rubber in channel can be slightly stretched but never pushed into the channel more than its natural length as it will distort the rubber.

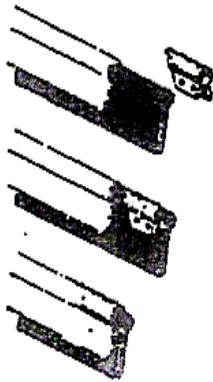

The Master Squeegee is identified by this trademark -

